

Submersible Sump Pump 2-1/2 inch Discharge



Teryair Submersible pumps have a small cross section and can be lowered into areas having small access hatches. Especially preferred where and electric spark may risk ignition or explosion.

Applications

- Construction
- De-watering
- Engineering industry
- Transfer of fluids, usage in sumps for periodic de watering
- Marine- emptying ballast tanks, after washing procedure
- Draining cargo holds during and after washing procedure
- Pumping of sea water from bilges, holds, etc.




Model : SP 25

Features

Will pump down to 22mm. will handle upto 3mm solids
Governor controlled motor. Compact design enables uses in restricted areas.

Specifications

IMPA No. : 59.16.36
Net weight : 30 Kgs
Height : 430 mm
Minimum opening pump will enter : 210mm x 305mm
Air inlet : 3/4" NPT
Air Outlet : 1-1/2" BSPP
Air consumption : 3.8 m3/min
Recommended hose size : 19mm (3/4")
Fluid inlet : Screen
Fluid outlet : 2-1/2" NPT

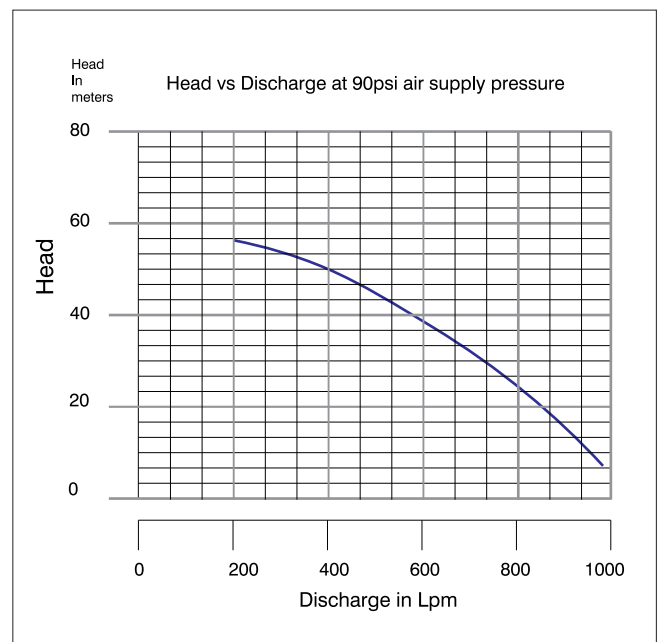

Teryair Equipment Pvt. Ltd.

An ISO 9001-2008 company

Sales Office: 416, Gundecha Industrial Complex,
Akurli Road, Kandivali East, Mumbai - 400 101
Maharashtra, India
Tel : +91 22 421 04 901 (20 Lines)

Fax : +91 22 421 04 909

Email : sales@teryair.com
info@teryair.com

Works: A-1, Tirupati Udyog Nagar, Sativali Road,
Vasai East, Thane - 401 208 Maharashtra, India

Tel : +91 250 6455260 (32 Lines)

Fax : +91 250 2450 693

Email: toolsales@teryair.com
info@teryair.com

www.teryair.com

